


Parafusos - SAM_11

| DIN 912 Parafusos Tipo Allen | | | | | | | |
|------------------------------|-------|--------------|-------------|-------------------------|---------------------------------|-----|-----|
| Diam | Passo | Cabeça | | Rosca Total (máximo) | Comprimentos Normalizados (c) | | |
| | | Diâmetro (D) | Largura (k) | | | | |
| M3 | 0,50 | 5,5 | 3,0 | 20 | 6 | 65 | 190 |
| M4 | 0,70 | 7,0 | 4,0 | 25 | 8 | 70 | 200 |
| M5 | 0,80 | 8,5 | 5,0 | 25 | 10 | 75 | 210 |
| M6 | 1,00 | 10,0 | 6,0 | 30 | 12 | 80 | 220 |
| M8 | 1,25 | 13,0 | 8,0 | 35 | 16 | 90 | 230 |
| M10 | 1,50 | 16,0 | 10,0 | 40 | 20 | 100 | 240 |
| M12 | 1,75 | 18,0 | 12,0 | 45 | 25 | 110 | 250 |
| M14 | 2,00 | 21,0 | 14,0 | 55 | 30 | 120 | 260 |
| M16 | 2,00 | 24,0 | 16,0 | 55 | 35 | 130 | 280 |
| M20 | 2,50 | 30,0 | 20,0 | 65 | 40 | 140 | 300 |
| M24 | 3,00 | 36,0 | 24,0 | 80 | 45 | 150 | 320 |
| M30 | 3,00 | 45,0 | 30,0 | 90 | 50 | 160 | 340 |
| M36 | 4,00 | 54,0 | 36,0 | 100 | 55 | 170 | 360 |
| M42 | 4,50 | 63,0 | 42,0 | 120 | 60 | 180 | 380 |

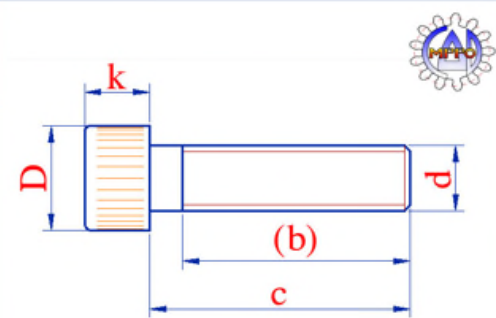

Digitar o comprimento (c)
35

Digitar o comprimento roscado (b)
25